




Di-QCLP0ER

- Powerful Microprocessor
- Functionally Programmable
- Fast Configurations
- Modbus Interface
- Wide range of supply voltage
- Additional options available

DiOne can be humidity, temperature, barometric pressure, differential pressure, carbon dioxide (CO₂), volatile organic compounds (VOC), particulate matter (PM) and/or Analog signal transmitters (it depends on the model). Settings of the device (LCD display configuration, Modbus parameters, etc.) can be modified through USB programming unit, PC software or Modbus interface

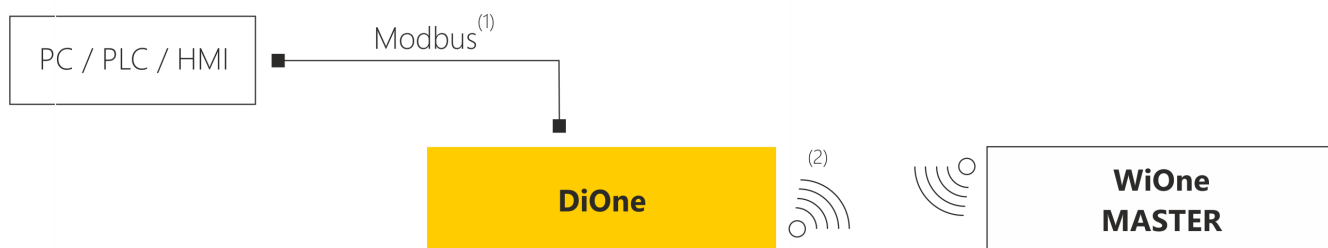


(1) - RS-485 interface (Modbus RTU) or Industrial Ethernet (Modbus TCP)

(2) - wireless interface (Radio 868 MHz)

DiOne transmitters offer Fieldbus (RS-485 - Modbus RTU) or Industrial Ethernet (Modbus TCP) interfaces for communication with a master device (e.g. PLC, HMI or PC). DiOne transmitters with radio modules (wireless transmission in the 868 MHz frequency band) are also available. DiOne devices may be used in HVAC systems, BMS systems and air parameters monitoring systems (with dedicated ADAPS or IDAPS software).

Technical drawing



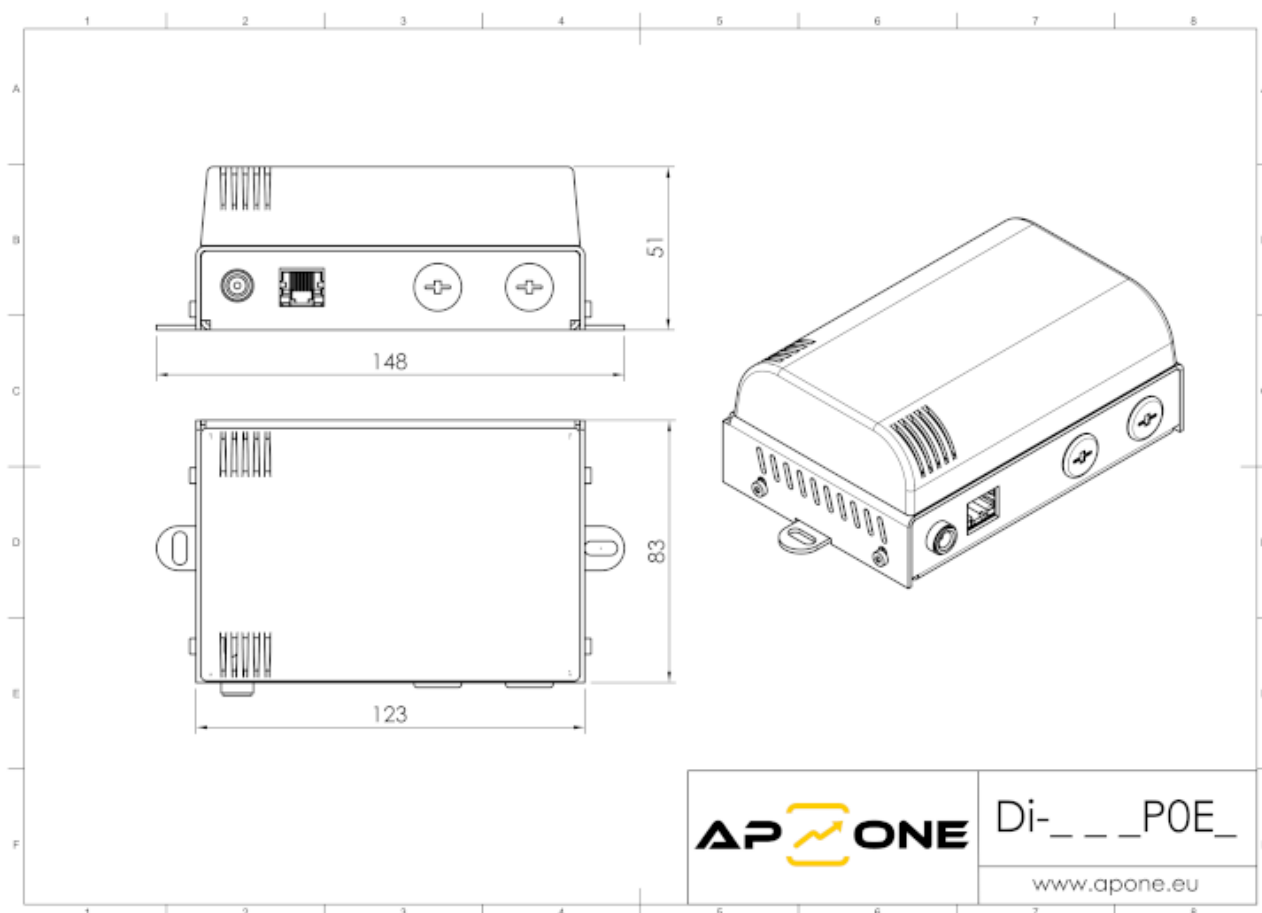

Kod produktu	Di-QCLP0ER
Typ urządzenia	Transmitter
Mierzone parametry	Carbon dioxide (CO ₂), Humidity, Temperature, VOC
Zakres pomiarowy	0...+50 °C, 0...100 %RH, 0...10000 ppm, 0...500 VOC index
Dokładność (maks.)	±0.4 °C, ±15 VOC index, ±3.0 %RH, ±30 PPM ±3% (% RD)
Częstotliwość pomiaru	0.25 Hz (CO ₂), 0.25 Hz (humidity), 0.25 Hz (temperature), 1 Hz (VOCs)
Dodatkowe opcje	Psychometric calculations
Typ sensora	Integrated
Filtr sensora	-
Zasilanie	11.5...27 VDC
Interfejs	Ethernet LAN (Modbus TCP), Radio 868MHz
Wyjścia analogowe	-
Wyjścia analogowe - typ	-
Wyjścia analogowe - rozdzielczość	-
Wyjścia binarne	-
Wyjścia binarne - parametry	-
Przyłącze elektryczne	DC-JACK (power supply) + RJ-45 (Ethernet)
Diody serwisowe	2x LED
Wyświetlacz	-
Parametryzacja	Configuration software, Modbus
Stopień ochrony	IP20
Temperatura pracy	0...+50 °C
Wilgotność pracy	0...95 %RH (WITHOUT CONDENSATION)
Typ obudowy	Wall
Materiał obudowy	ABS, Stainless steel
Wymiary obudowy	See: drawing
W komplecie	Manual

Produkty powiązane





Zasilacz ZAS-24-WT



Listwa przyłączeniowa CONBLOCK-05



Di-XXXXXXX-ART



Antena ANT-868-01



Antena ANT-868-02



Zasilacz ZAS-12-DIN



Antena ANT-868-03



Adapter montażowy ADP120A



Puszka przyłączeniowa CONBOX-05





Adapter montażowy ADP120L



Zasilacz ZAS-12-WT



Zasilacz ZAS-24-DIN

Producent zastrzega sobie prawo do dokonywania zmian niektórych parametrów w związku z ciągłą pracą nad udoskonalaniem konstrukcji urządzenia, bez powiadamiania o tym jego użytkowników.

