




Pi-S0011A0

- Powerful Microprocessor
- Functionally Programmable
- Fast Configurations
- Modbus Interface
- Additional options available

PiOne may be used as air temperature and relative humidity transmitter in industrial applications. PiOne devices are perfect solutions for channel measurements due to its compact housing (electronics and sensor are integrated). Basic parameters, including network settings, are configured with dedicated software – APConfigPC [PiOne].

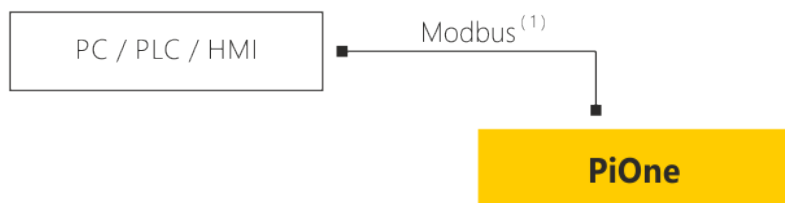


(1) – RS-485 interface (Modbus RTU)

The PiOne transmitter has an RS-485 (Modbus RTU) communication interface for communication with a master device (e.g. PLC, HMI or PC).

Technical drawing



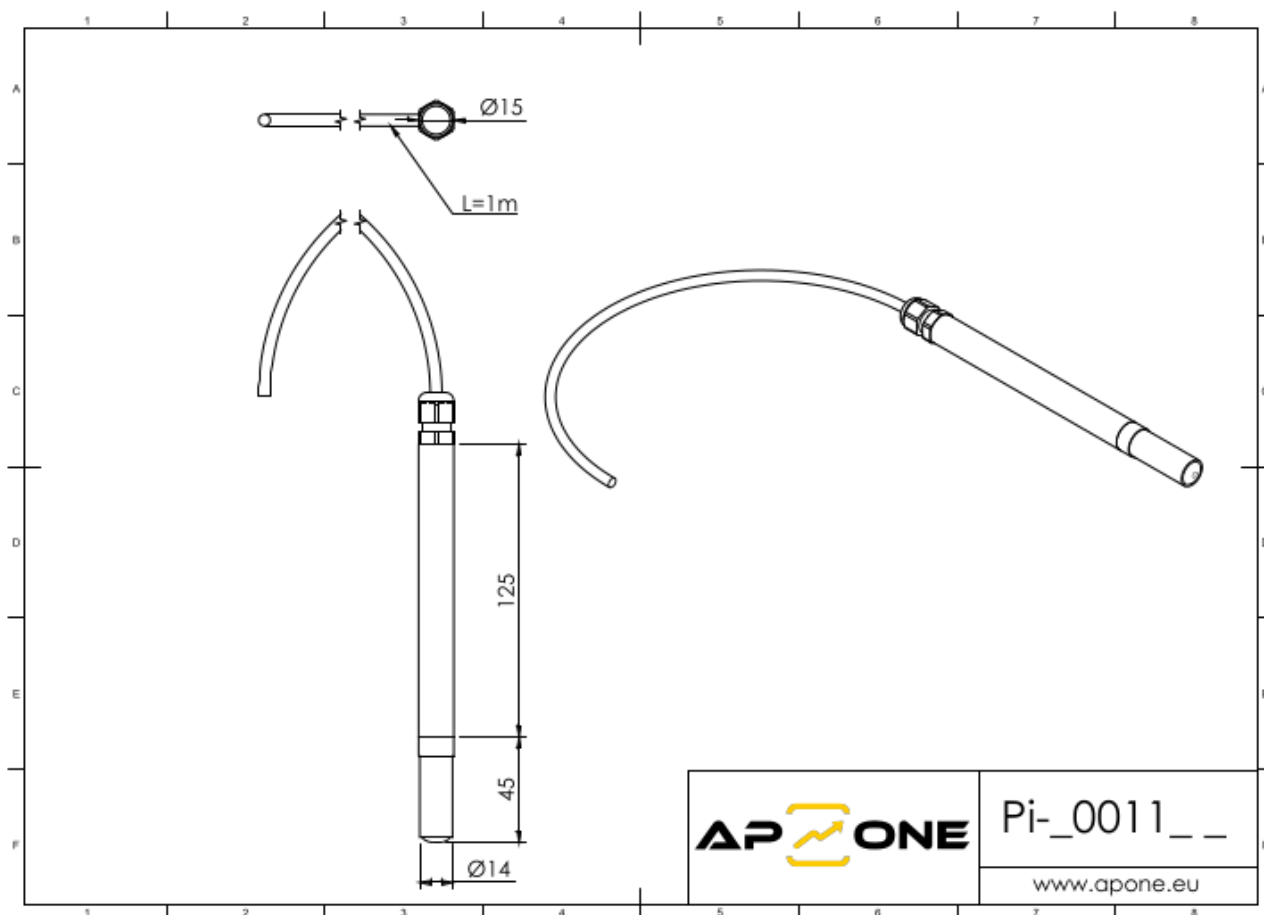

All dimension in mm. This drawing is for informational purposes only. The manufacturer reserves the right to make changes in the product dimensions without prior notice.



Kod produktu	Pi-S0011A0
Typ urządzenia	Transmitter
Mierzone parametry	Humidity, Temperature
Zakres pomiarowy	-30...+70 °C, 0...100 %RH
Dokładność (maks.)	±0.2 °C, ±2.0 %RH
Częstotliwość pomiaru	1 Hz, 1 Hz (humidity)
Dodatkowe opcje	Psychometric calculations
Typ sensora	Integrated
Filtr sensora	Polyethylene filter (40 µm)
Zasilanie	4,75... 17 VDC
Interfejs	RS-485 (Modbus RTU)
Wyjścia analogowe	-
Wyjścia analogowe - typ	-
Wyjścia analogowe - rozdzielczość	-
Wyjścia binarne	-
Wyjścia binarne - parametry	-
Przyłącze elektryczne	Cable
Diody serwisowe	-
Wyświetlacz	-
Pamięć - rejestrowane dane	-
Pamięć - typ	-
Pamięć - pojemność	-
Pamięć - częstotliwość zapisu	-
Parametryzacja	Configuration software, Modbus
Stopień ochrony	IP42
Temperatura pracy	-30...+70 °C
Wilgotność pracy	0...95 %RH (WITHOUT CONDENSATION)
Typ obudowy	Duct, Miniaturowa, Wall
Materiał obudowy	Aluminium
Wymiary obudowy	See: drawing
W komplecie	-

Produkty powiązane





Zasilacz ZAS-12-WT



Programator CODAP-RS485



Listwa przyłączeniowa CONBLOCK-05



Konwerter CONV-RS485/LAN



Puszka przyłączeniowa CONBOX-05



Zasilacz ZAS-12-DIN



Konwerter CONV-RS485/USB

Producent zastrzega sobie prawo do dokonywania zmian niektórych parametrów w związku z ciągłą pracą nad udoskonalaniem konstrukcji urządzenia, bez powiadamiania o tym jego użytkowników.

