




Si-G01G1U2

- Powerful Microprocessor
- Functionally Programmable
- Fast Configurations
- Modbus Interface
- Wide range of supply voltage
- Additional options available

SiOne can be humidity, temperature, barometric pressure, differential pressure, carbon dioxide (CO₂), volatile organic compounds (VOC), particulate matter (PM) and/or Analog signal transmitters (it depends on model). The SiOne line combined with an internal and/or external sensors provide state-of-the-art functionality. Various models are available including wall, duct or remote sensors. SiOne is introducing powerful programming capabilities. Settings of the device can be modified through USB programming unit, PC software or Modbus interface. Modbus RTU baud rate, Modbus RTU address and type of Analog outputs can be fast changed by configuration jumpers.

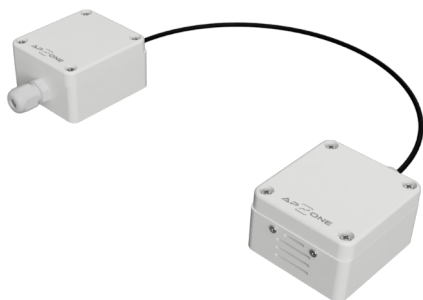

(1) – RS-485 interface (Modbus RTU) or Industrial Ethernet (Modbus TCP)

(2) – programmable relay output On/Off (option)

(3) – programmable (up to 3) Analog outputs: 0...5 V, 0...10 V, 0...20 mA or 4...20 mA (option)

SiOne transmitters offers Fieldbus (RS-485 – Modbus RTU) or Industrial Ethernet (Modbus TCP) interfaces. The SiOne line can provide up to three fully programmable and scalable Analog outputs (types of output: 0...5 V, 0...10 V, 0...20 mA or 4...20 mA). Analog output can be modified by configurations jumpers, Modbus interface or USB programming unit. SiOne transmitter with relay output can be used as simple binary sensor (pressostat, hygostat, thermostat, CO₂-stat, ...). Threshold and hysteresis of output can be also modified by Modbus or



programming unit.



Kod produktu	Si-G01G1U2
Typ urządzenia	Transmitter
Mierzone parametry	NO ₂ concentration, O ₂ concentration, O ₃ concentration, SO ₂ concentration
Zakres pomiarowy	different with Sens-G-,,, sensor
Dokładność (maks.)	Different for Sens-G-... sensor
Częstotliwość pomiaru	Different for Sens-G-... sensors
Dodatkowe opcje	Interchangeable Sens-G-... sensor
Typ sensora	Interchangeable probe
Filtr sensora	Wire mesh filter – 0.22 mm
Zasilanie	11.5...32 VDC / 24 VAC ± 5% (...HV version), 11.5...27 VDC
Interfejs	RS-485 (Modbus RTU)
Wyjścia analogowe	2x
Wyjścia analogowe - typ	0...10 V, 0...5 V
Wyjścia analogowe - rozdzielczość	12-bit
Wyjścia binarne	-
Wyjścia binarne - parametry	-
Przyłącze elektryczne	Screw connection – 16...28 AWG (1,31...0,081 mm ²)
Diody serwisowe	2x LED
Wyświetlacz	-
Pamięć - rejestrowane dane	-
Pamięć - typ	-
Pamięć - pojemność	-
Pamięć - częstotliwość zapisu	-
Parametryzacja	Configuration software, DIP-switches, Modbus
Stopień ochrony	IP65 (FRONT) / IP20 (REAR)
Temperatura pracy	-30...+60 °C
Wilgotność pracy	0...95 %RH (WITHOUT CONDENSATION)
Typ obudowy	Cable
Materiał obudowy	Polycarbonate
Wymiary obudowy	See: drawing
W komplecie	Manual

Produkty powiązane





Konwerter CONV-RS485/LAN



Zasilacz ZAS-12-DIN



Konwerter CONV-RS485/USB




Zasilacz ZAS-12-WT



XX-XXXXXXX-LOGO



Puszka przyłączeniowa CONBOX-05



Sens-G-NO2



Listwa przyłączeniowa CONBLOCK-05



Zasilacz ZAS-24-DIN





Programator CODAP-RS485



Zasilacz ZAS-24-WT



Sens-G-SO2



Sens-G-O2



Sens-G-O3

Producent zastrzega sobie prawo do dokonywania zmian niektórych parametrów w związku z ciągłą pracą nad udoskonalaniem konstrukcji urządzenia, bez powiadamiania o tym jego użytkowników.

