


Ti-S10N2A2

- Inexpensive HVAC transmitters
- Measures relative humidity and temperature
- Wall or duct version available
- Wide range of supply voltage
- Up to two analog voltage outputs
- Easy mechanical installation

The TiOne series is an inexpensive HVAC transmitters for temperature, relative humidity or temperature & relative humidity. Various models of TiOne transmitters are available including wall and duct sensors. TiOne transmitters offer one or two analog outputs (depending on model).

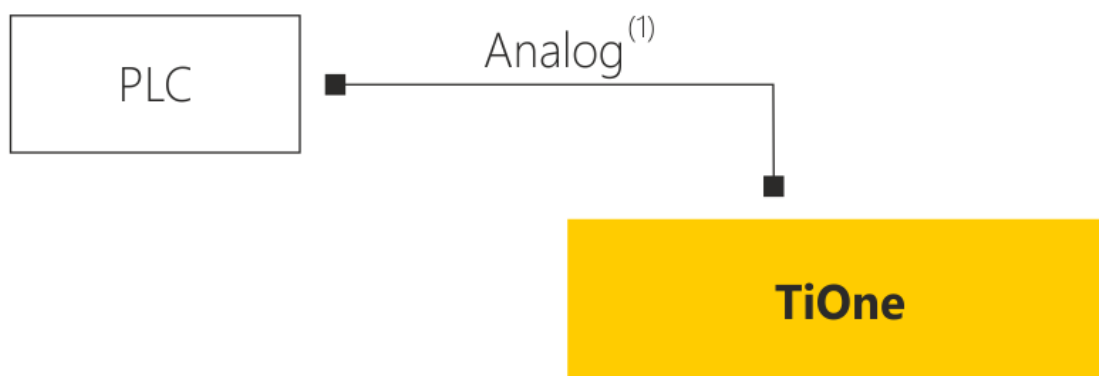


(1) – analog outputs (up to 2): 0...10 V

TiOne transmitters offer up to two analog outputs (0...10V). It is the most popular standard in HVAC and BMS systems.

Technical drawing



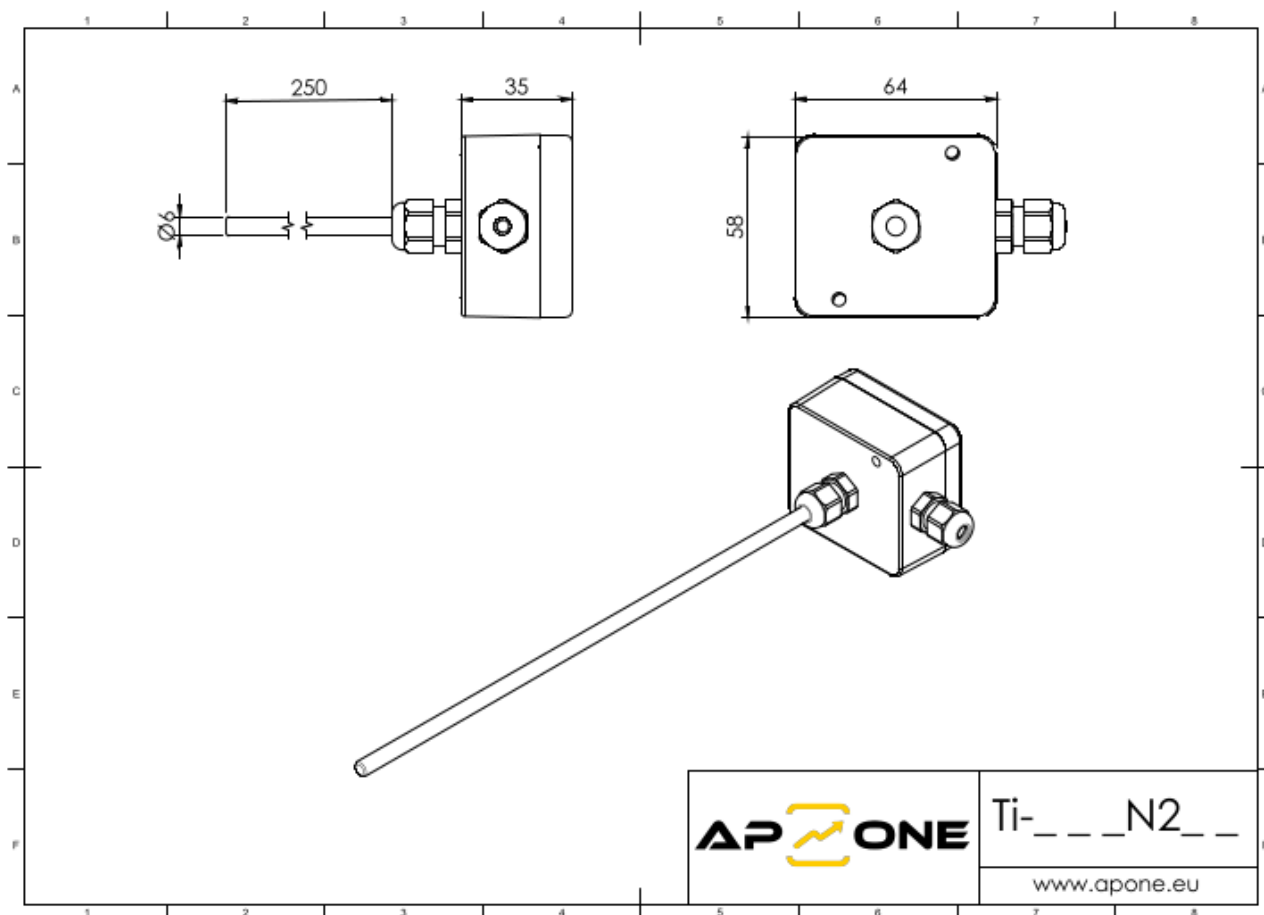

All dimension in mm. This drawing is for informational purposes only. The manufacturer reserves the right to make changes in the product dimensions without prior notice.



Kod produktu	Ti-S10N2A2
Typ urządzenia	Transmitter
Mierzone parametry	Humidity, Temperature
Zakres pomiarowy	-20...+50 °C, 0...100 %RH
Dokładność (maks.)	±0.5 °C, ±3.0 %RH
Dodatkowe opcje	-
Typ sensora	Integrated
Zasilanie	20...28 VDC, 24 VAC
Interfejs	Analog (0...10 V)
Wyskalowanie	1...9 V = -45...+125 °C, 1...9 V = 0...+100 %RH
Przyłącze elektryczne	Screw terminal - 30-18 AWG (0.0509-0.823 mm ²)
Stopień ochrony	IP65
Temperatura pracy	-40...+85 °C
Wilgotność pracy	0...95 %RH (WITHOUT CONDENSATION)
Typ obudowy	Duct
Materiał obudowy	ABS, Steel (dipstick)
Wymiary obudowy	See: drawing
W komplecie	Manual

Producent zastrzega sobie prawo do dokonywania zmian niektórych parametrów w związku z ciągłą pracą nad udoskonalaniem konstrukcji urządzenia, bez powiadamiania o tym jego użytkowników.

